





# KF 1200

FABBRICATORI DI GHIACCIO GRANULARE  
 MACHINES À GLACE EN GRAINS  
 ICE FLAKE MACHINES  
 FABRICADORES DE HIELO GRANULAR  
 EISFLOCKENBEREITER

SERIE KF 45 85 145 185 100 200 300 600 1200 2500

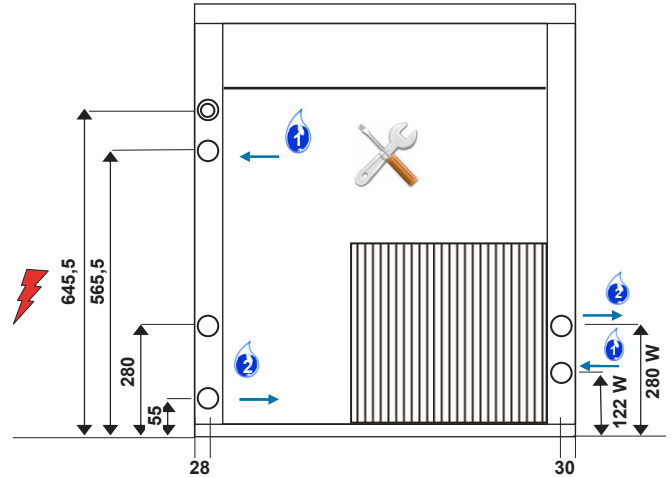

USCITA GHIACCIO  
 SORTIE GLACE  
 ICE EXIT  
 SALIDA DE HIELO  
 EISAUSGANG


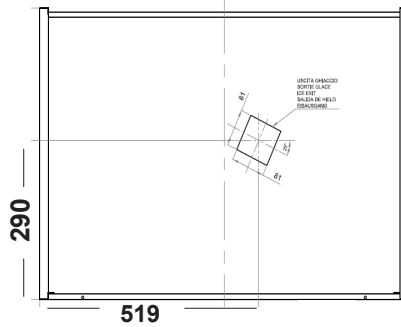


Air

Water

Stainless steel AISI 304

L=1800 mm		
ø 3/4"		
ø 3/4"		
130÷140 mm		

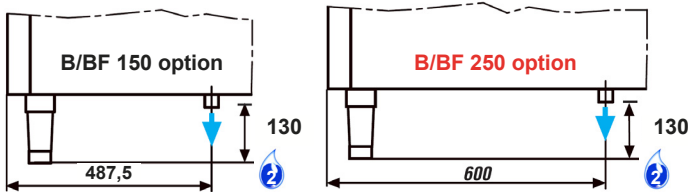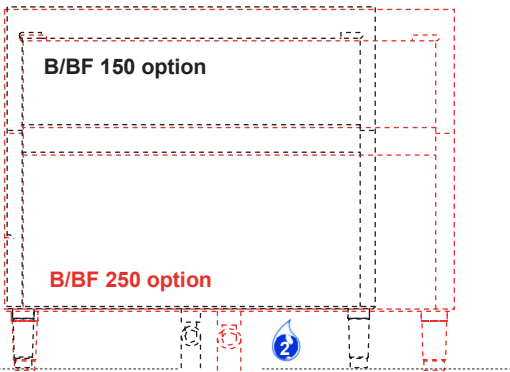


Kg / 24h - Air				
	38°	632	32°	
	32°	851	21°	
	21°	1035	15°	
	10°	1150	10°	

Kg / 24h - Water				
	38°	873	32°	
	32°	1002	21°	
	21°	1083	15°	
	10°	1165	10°	



Stainless steel AISI 304



Air



Water

# KF 1200

FABBRICATORI DI GHIACCIO GRANULARE  
MACHINES À GLACE EN GRAINS  
ICE FLAKE MACHINES  
FABRICADORES DE HIELO GRANULAR  
EISFLOCKENBEREITER

## Dati tecnici – Caractéristiques techniques – Technical specifications – Datos técnicos – Technische Daten

Prod.Kg/24h +10°C - Prod.Lb/24h +10°C		<b>1150-2530</b>
Prod.Kg/24h +10°C - Prod.Lb/24h +10°C		<b>1165-2563</b>
Contenitore/Bac/Bin/Depósito/Behälter <b>OPTION B/BF 150</b>	Kg/Lb	<b>150-330</b>
Contenitore/Bac/Bin/Depósito/Behälter <b>OPTION B/BF 250</b>	Kg/Lb	<b>250-550</b>
Larghezza/Largeur/Width/Anchura/Breite	mm	<b>850</b>
Profondità/Profondeur/Depth/Profundidad/Tiefe	mm	<b>640</b>
Altezza/Hauteur/Height/Altura/Höhe	mm	<b>915</b>
Peso netto/Poids net/Net weight/Peso neto/Nettogewicht	Kg	<b>173</b>
Peso lordo/Poids brut/Gross weight/Peso bruto/Bruttogewicht	Kg	<b>190</b>
Vol. imballo/Vol.embal/Vol.(packed)/Volumen con embalaje/Verpackungsvolumen	m <sup>3</sup>	<b>0,76</b>
Alimentazione/Voltage/Voltaje/Anschlusspannung	V/Hz/ph	<b>400/50/3</b>
Compressore/Compresseur/Compressor/Compresor/Kompressor	HP	<b>3</b>
Compressore/Compresseur/Compressor/Compresor/Kompressor (T evap.= -15°C)	W	<b>3500</b>
Watt - Totale/Total/Total/Total/Gesaint (T = +43°C)	W	<b>3600</b>
Calorie/Calorie/Calorie/Caloria/Kalorie cond.	Kcal / h	<b>4970</b>
Ampère - Totale/Total/Total/Total/Gesamt	A	<b>5,5</b>
Fusibile/Fusible/Recommended fuse/Fusible/Netzsicherung	A	<b>3X15</b>
Refrigerante/Réfrigérant/Cooling gas/Refrigerante/Kühlmittel	R	<b>452A</b>
Carica/Charge/Fill/Carga/Füllmenge	Kg	<b>1,200</b>
eq. CO <sub>2</sub>	Kg	<b>2570</b>
GWP		<b>2141</b>
Carica/Charge/Fill/Carga/Füllmenge	Kg	<b>0,700</b>
eq. CO <sub>2</sub>	Kg	<b>1499</b>
GWP		<b>2141</b>
Entrata acqua/Entrée eau/Water inlet/Entrada agua/Wasseranschluß	Ø	<b>3/4"</b>
Scarico acqua/Vidange eau/Water outlet/Desague/Wasserabfluß	Ø	<b>3/4"</b>
Acqua/Eau/Water/Agua/Wasser - lt / h  21°C /  15°C		<b>48-117</b>
Pressione acqua/Pression eau/Water pressure/Presión agua/Wasserdruck - bar	min / max	<b>1 - 6</b>
Temp.ambiente/Temp.ambient/Ambient temp./Temp.ambiente/Rammtemperatur - °C	min / max	<b>10 - 40</b>
Temp. acqua/Temp. eau/Water temp./Temp. agua/Wassertemperatur - °C	min / max	<b>5 - 35</b>

