





KFP 200

FABBRICATORI DI GHIACCIO GRANULARE PRESSATO
 MACHINES À GLACE EN GRAINS PRESSÉE
 ICE FLAKE MACHINES - PRESSED ICE FLAKES
 FABRICADORES DE HIELO GRANULAR PRENSADO
 EISFLOCKENBEREITER GEPRESSTE EISFLOCKEN

SERIE **KFP** 85 145 200 300 600 1200 2500

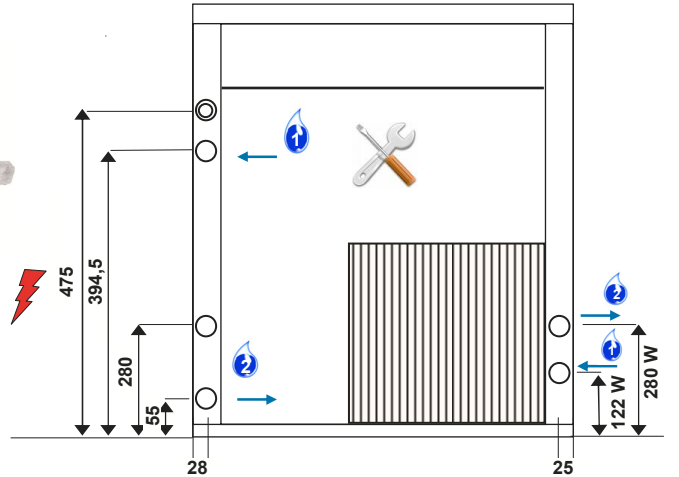


USCITA GHIACCIO
 SORTIE GLACE
 ICE EXIT
 SALIDA DE HIELO
 EISAUSGANG

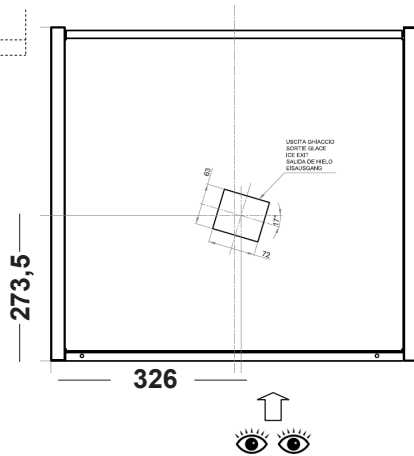

Air
 Water

Stainless steel AISI 304

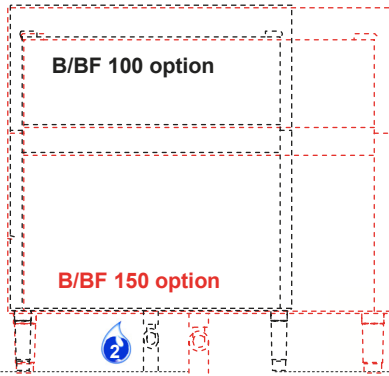




| | | |
|------------|--|--|
| L=1800 mm | | |
| ø 3/4" | | |
| ø 3/4" | | |
| 130÷140 mm | | |

Kg / 24h - Air

| | | | | |
|--|-----|-----|-----|--|
| | 38° | 102 | 32° | |
| | 32° | 132 | 21° | |
| | 21° | 162 | 15° | |
| | 10° | 175 | 10° | |


Kg / 24h - Water

| | | | | |
|--|-----|-----|-----|--|
| | 38° | 135 | 32° | |
| | 32° | 155 | 21° | |
| | 21° | 170 | 15° | |
| | 10° | 180 | 10° | |





Stainless steel AISI 304



Air



Water

KFP 200

FABBRICATORI DI GHIACCIO GRANULARE PRESSATO
MACHINES À GLACE EN GRAINS PRESSÉE
ICE FLAKE MACHINES - PRESSED ICE FLAKES
FABRICADORES DE HIELO GRANULAR PRENSADO
EISFLOCKENBEREITER GEPRESSTE EISFLOCKEN

Dati tecnici – Caractéristiques techniques – Technical specifications – Datos técnicos – Technische Daten

| | | |
|---|----------------|-----------------|
| Prod.Kg/24h +10°C - Prod.Lb/24h +10°C | | 175-385 |
| Prod.Kg/24h +10°C - Prod.Lb/24h +10°C | | 180-396 |
| Contenitore/Bac/Bin/Depósito/Behälter OPTION B/BF 100 | Kg/Lb | 100-220 |
| Contenitore/Bac/Bin/Depósito/Behälter OPTION B/BF 150 | Kg/Lb | 150-330 |
| Larghezza/Largeur/Width/Anchura/Breite | mm | 560 |
| Profondità/Profondeur/Depth/Profundidad/Tiefe | mm | 640 |
| Altezza/Hauteur/Height/Altura/Höhe | mm | 622 |
| Peso netto/Poids net/Net weight/Peso neto/Nettogewicht | Kg | 58 |
| Peso lordo/Poids brut/Gross weight/Peso bruto/Bruttogewicht | Kg | 63 |
| Vol. imballo/Vol.embal/Vol.(packed)/Volumen con embalaje/Verpackungsvolumen | m ³ | 0,30 |
| Alimentazione/Voltage/Voltaje/Anschlussspannung | V/Hz/ph | 230/50/1 |
| Compressore/Compresseur/Compressor/Compresor/Kompressor | HP | 1/2 |
| Compressore/Compresseur/Compressor/Compresor/Kompressor (T evap.= -10°C) | W | 676 |
| Watt - Totale/Total/Total/Total/Gesaint (T = +43°C) | W | 720 |
| Calorie/Calorie/Calorie/Caloria/Kalorie cond. | Kcal / h | 1040 |
| Ampère - Totale/Total/Total/Total/Gesamt | A | 4 |
| Fusibile/Fusible/Recommended fuse/Fusible/Netzisierung | A | 10 |
| Refrigerante/Réfrigérant/Cooling gas/Refrigerante/Kühlmittel | R | 290 |
| Carica/Charge/Fill/Carga/Füllmenge | Kg | 0,095 |
| eq. CO ₂ | Kg | 0,285 |
| GWP | | 3 |
| Carica/Charge/Fill/Carga/Füllmenge | Kg | 0,065 |
| eq. CO ₂ | Kg | 0,195 |
| GWP | | 3 |
| Entrata acqua/Entrée eau/Water inlet/Entrada agua/Wasseranschluß | Ø | 3/4" |
| Scarico acqua/Vidange eau/Water outlet/Desague/Wasserabfluß | Ø | 3/4" |
| Acqua/Eau/Water/Agua/Wasser - lt / h 21°C / 15°C | | 7-25 |
| Pressione acqua/Pression eau/Water pressure/Presión agua/Wasserdruck - bar | min / max | 1 - 6 |
| Temp.ambiente/Temp.ambient/Ambient temp./Temp.ambiente/Rammtemperatur - °C | min / max | 10 - 40 |
| Temp. acqua/Temp. eau/Water temp./Temp. agua/Wassertemperatur - °C | min / max | 5 - 35 |