







KV 190

FABBRICATORI DI GHIACCIO IN CUBETTI
MACHINES À GLAÇONS
ICE CUBE MACHINES
FABRICADORES DE HIELO EN CUBITOS
EISWÜRFELBEREITER


SERIE KV 40 80 120 150 190 290 400



Stainless Steel AISI 304

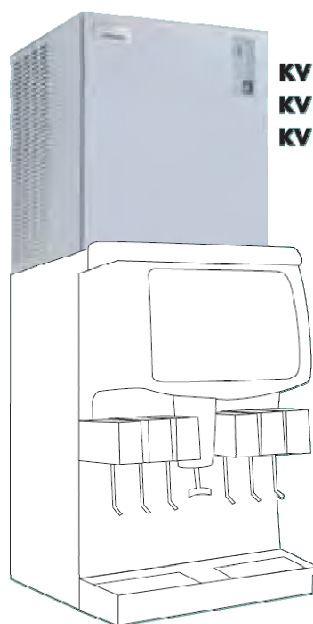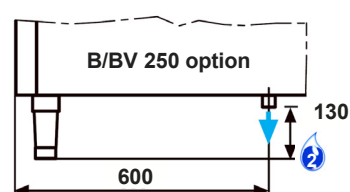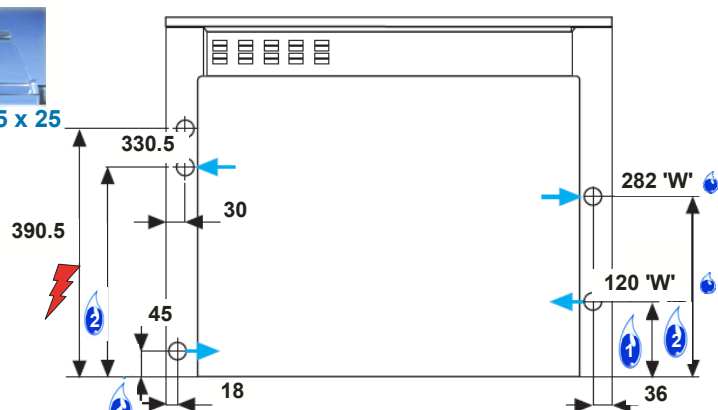

KV 150
KV 200 22''
KV 250 22''

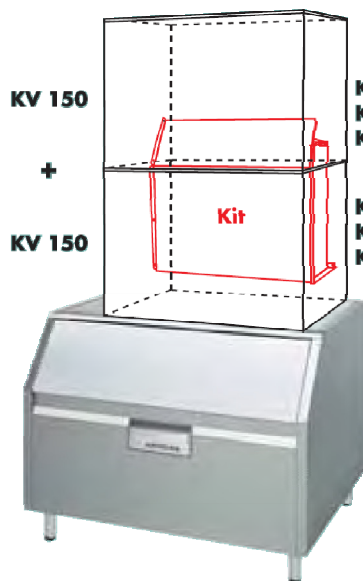

KV 150

KV 150

KV 190
KV 290
KV 400
+
KV 190
KV 290
KV 400

L=1800 mm		
ø 3/4"		
ø 3/4"		
130+140 mm		





Kg / 24h - Air			
	38°	108	32°
	32°	131	21°
	21°	175	15°
	10°	195	10°

Kg / 24h - Water			
	38°	146	32°
	32°	165	21°
	21°	192	15°
	10°	200	10°



Stainless Steel AISI 304



25 x 25 x 25



Air



Water

KV 190

FABBRICATORI DI GHIACCIO IN CUBETTI
MACHINES À GLAÇONS
ICE CUBE MACHINES
FABRICADORES DE HIELO EN CUBITOS
EISWÜRFELBEREITER

Dati tecnici – Caractéristiques techniques – Technical specifications – Datos tecnicos – Technische Daten

Prod.Kg/24h +10°C - Prod.Lb/24h +10°C		195-429
Prod.Kg/24h +10°C - Prod.Lb/24h +10°C		200-440
Cubetti/Glaçons /cubes/cubitos/Würfel - n° /24h		16250
Cubetti/Glaçons /cubes/cubitos/Würfel - n° /24h		16670
Contenitore/Bac/Bin/Depósito/Behälter OPTION B/BV 150	Kg/Lb	150-330
Contenitore/Bac/Bin/Depósito/Behälter OPTION B/BV 250	Kg/Lb	250-550
Dimensione cubetto/Dimensions glaçons/Cubes sizing/Dim. cubitos/Würfelgröße	mm	25x25x25
Larghezza/Largeur/Width/Anchura/Breite	mm	750
Profondità/Profondeur/Depth/Profundidad/Tiefe	mm	625
Altezza/Hauteur/Height/Altura/Höhe	mm	562
Peso netto/Poids net/Net weight/Peso neto/Nettogewicht	Kg	70
Peso lordo/Poids brut/Gross weight/Peso bruto/Bruttogewicht	Kg	79
Vol. imballo/Vol.embal/Vol.(packed)/Volumen con embalaje/Verpackungsvolumen	m ³	0,40
Alimentazione/Voltage/Voltage/Anschlussspannung	V/Hz/ph	230/50/1
Compressore/Compresseur/Compressor/Compresor/Kompressor	HP	1
Compressore/Compresseur/Compressor/Compresor/Kompressor (T evap.= -15°C)	W	1250
Watt - Totale/Total/Total/Total/Gesaint (T = +43°C)	W	1100
Calorie/Calorie/Calorie/Caloria/Kalorie cond.	Kcal / h	2420
Ampère - Totale/Total/Total/Total/Gesamt	A	6,5
Fusibile/Fusible/Recommanded fuse/Fusible/Netzsicherung	A	20
Refrigerante/Réfrigérant/Cooling gas/Refrigerante/Kühlmittel	R	404A
Carica/Charge/Fill/Carga/Füllmenge	Kg	0,750
eq. CO ₂	Kg	2942
GWP		3922
Carica/Charge/Fill/Carga/Füllmenge	Kg	0,350
eq. CO ₂	Kg	1373
GWP		3922
Entrata acqua/Entrée eau/Water inlet/Entrada agua/Wasseranschluß	Ø	3/4"
Scarico acqua/Vidange eau/Water outlet/Desague/Wasserabfluß	Ø	3/4"
Acqua/Eau/Water/Agua/Wasser - lt / h 21°C / 15°C		9-38
Pressione acqua/Pression eau/Water pressure/Presión agua/Wasserdruck - bar	min / max	1 - 6
Temp.ambiente/Temp.ambient/Ambient temp./Temp.ambiente/Rammtemperatur - °C	min / max	10 - 40
Temp. acqua/Temp. eau/Water temp./Temp. agua/Wassertemperatur - °C	min / max	5 - 35

