





KV 290

FABBRICATORI DI GHIACCIO IN CUBETTI
MACHINES À GLAÇONS
ICE CUBE MACHINES
FABRICADORES DE HIELO EN CUBITOS
EISWÜRFELBEREITER


SERIE KV 40 80 120 150 190 290 400



Stainless Steel AISI 304

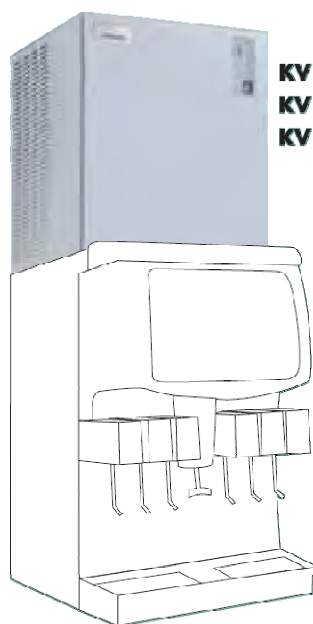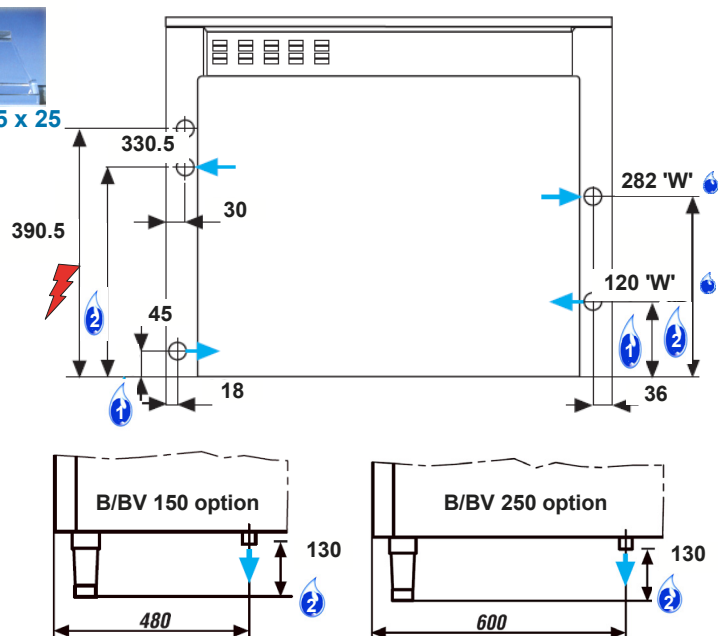

KV 150
KV 200 22"
KV 250 22"

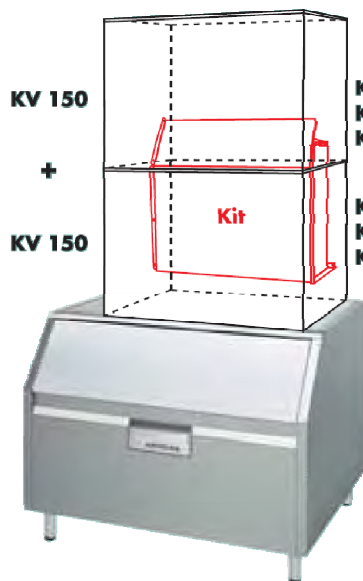

KV 150

+

KV 150

KV 190

KV 290

KV 400

+

KV 190

KV 290

KV 400

L=1800 mm		
ø 3/4"		
ø 3/4"		
130+140 mm		



Kg / 24h - Air			
	38°	159	32°
	32°	191	21°
	21°	249	15°
	10°	290	10°

Kg / 24h - Water			
	38°	236	32°
	32°	268	21°
	21°	283	15°
	10°	295	10°





Stainless Steel AISI 304



25 x 25 x 25



Air



Water

KV 290

FABBRICATORI DI GHIACCIO IN CUBETTI
MACHINES À GLAÇONS
ICE CUBE MACHINES
FABRICADORES DE HIELO EN CUBITOS
EISWÜRFELBEREITER

Dati tecnici – Caractéristiques techniques – Technical specifications – Datos tecnicos – Technische Daten

Prod.Kg/24h +10°C - Prod.Lb/24h +10°C		290-638
Prod.Kg/24h +10°C - Prod.Lb/24h +10°C		295-649
Cubetti/Glaçons /cubes/cubitos/Würfel - n° /24h		24170
Cubetti/Glaçons /cubes/cubitos/Würfel - n° /24h		24590
Contenitore/Bac/Bin/Depósito/Behälter OPTION B/BV 150	Kg/Lb	150-330
Contenitore/Bac/Bin/Depósito/Behälter OPTION B/BV 250	Kg/Lb	250-550
Dimensione cubetto/Dimensions glaçons/Cubes sizing/Dim. cubitos/Würfelgröße	mm	25x25x25
Larghezza/Largeur/Width/Anchura/Breite	mm	750
Profondità/Profondeur/Depth/Profundidad/Tiefe	mm	625
Altezza/Hauteur/Height/Altura/Höhe	mm	562
Peso netto/Poids net/Net weight/Peso neto/Nettogewicht	Kg	80
Peso lordo/Poids brut/Gross weight/Peso bruto/Bruttogewicht	Kg	86
Vol. imballo/Vol.embal/Vol.(packed)/Volumen con embalaje/Verpackungsvolumen	m ³	0,40
Alimentazione/Voltage/Voltaje/Anschlussspannung	V/Hz/ph	230/50/1
Compressore/Compresseur/Compressor/Compresor/Kompressor	HP	1,7
Compressore/Compresseur/Compressor/Compresor/Kompressor (T evap.= -15°C)	W	2100
Watt - Totale/Total/Total/Total/Gesaint (T = +43°C)	W	1500
Calorie/Calorie/Calorie/Caloria/Kalorie cond.	Kcal / h	3000
Ampère - Totale/Total/Total/Total/Gesamt	A	8,5
Fusibile/Fusible/Recommanded fuse/Fusible/Netzisierung	A	20
Refrigerante/Réfrigérant/Cooling gas/Refrigerante/Kühlmittel	R	404A
Carica/Charge/Fill/Carga/Füllmenge	Kg	0,800
eq. CO ₂	Kg	3138
GWP		3922
Carica/Charge/Fill/Carga/Füllmenge	Kg	0,350
eq. CO ₂	Kg	1373
GWP		3922
Entrata acqua/Entrée eau/Water inlet/Entrada agua/Wasseranschluß	Ø	3/4"
Scarico acqua/Vidange eau/Water outlet/Desague/Wasserabfluß	Ø	3/4"
Acqua/Eau/Water/Agua/Wasser - lt / h 21°C / 15°C		11-47
Pressione acqua/Pression eau/Water pressure/Presión agua/Wasserdruck - bar	min / max	1 - 6
Temp.ambiente/Temp.ambient/Ambient temp./Temp.ambiente/Rammtemperatur - °C	min / max	10 - 40
Temp. acqua/Temp. eau/Water temp./Temp. agua/Wassertemperatur - °C	min / max	5 - 35

